

2015/2016



PREMIUM OAK

Wood in all its glory



Premium
FLOORS AUSTRALIA

EXTRA WIDE BOARDS IN TRENDY DESIGNS

The Premium Oak range uses rustic grade European Oak, designed to bring the features of the forest to your floor. These rustic features are matched with a brushed and textured matt surface for a classic timeless look and feel. Bevels on the long side, and a palette of contemporary colours provide a platform for any modern interior.

HIGHLY SCRATCH, WEAR AND STAIN RESISTANT

The planks are finished with a highly scratch, wear and stain resistant European lacquer for optimal performance. In fact, testing has shown that Premium Oak is coated with one of the most wear resistant pre-finished coatings available, offering complete peace of mind well into the future!




STRONGEST JOINING SYSTEM

Premium Oak comes with the best and strongest joining system in the world, Uniclic®, profiled on all four sides of each and every board. This ensures fast and easy installation, and no gaps immediately after installation.

SUPERIOR STABILITY

Premium Oak planks have superior stability thanks to the stable and durable plantation hardwood core, ensuring that your floors stays beautiful for years and years to come. Premium Oak is manufactured to the highest standards in the world in our own European operated plant.

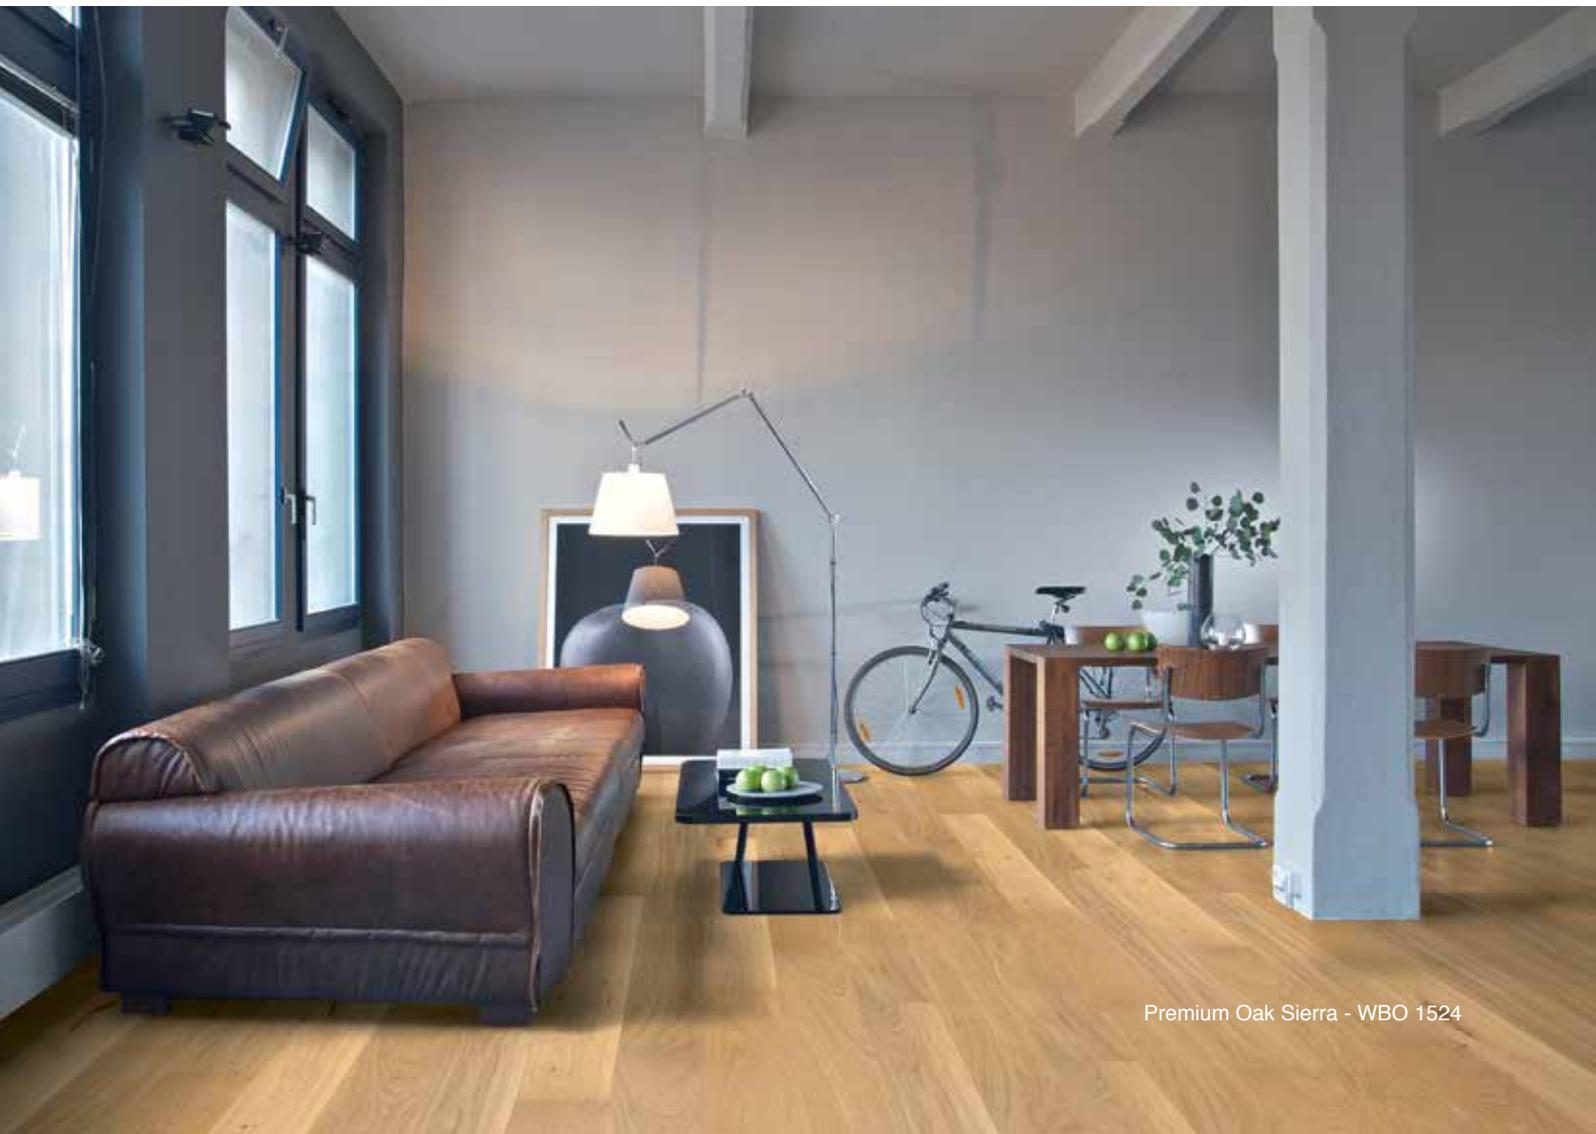

GRADING

Premium Oak contains a lively level of variation in colour and grain structure. Planks have been selected with large filled knots to provide an authentic “forest to the floor” charm.

Colour

lively variation



Knots

max. 50 mm



Sapwood

allowed

IT'S NATURAL

Remember, Timber is a natural product and graded according to AS2796 standard and better. This provides for a selection of knots and other natural features in line with the beauty of natural oak. Colour variation is also to be expected and distinguishes your Premium Oak as natural timber, not a manufactured imitation.

Remember wood flooring is not colour fast. Whenever samples or flooring are exposed to natural light, they will change colour. This is a natural part of wood.

Also remember that there is always some slight noise associated with any wood flooring systems, this is a normal part of wood flooring and may vary from time to time with the climate.

CREATING TIMBER FRIENDLY INDOOR ENVIRONMENT

Timber floors should not be installed more than two weeks prior to a new dwelling being occupied and curtains, blinds and/or window tinting being installed so that the floor will experience normal ‘interior’ conditions. Otherwise, extreme indoor conditions may lead to cracking, shrinking, cupping or other distortion of the wood flooring. Such damage resulting from extreme conditions is not covered by warranty.

Premium Oak is genuine timber flooring, therefore proper care and maintenance is required to avoid unnecessary marking and scratching.


INSTALLATION

Floating or glued down, it's your choice! Thanks to the Uniclic® click system, Premium Oak can be installed as a floating floor or glued directly to level, clean subfloors like timber or concrete.

FLOATING

Premium Oak can be installed as a floating floor on a high quality underlay which will reduce footfall sound. This method has a lot of advantages. The installation is faster and you can enjoy your floor immediately, no waiting time for the glue to dry. It is also easier to take up than glue-down floors, and easier to repair in the event that one or two boards become damaged down the track!

METHOD 1 : ROTATE AND CLICK

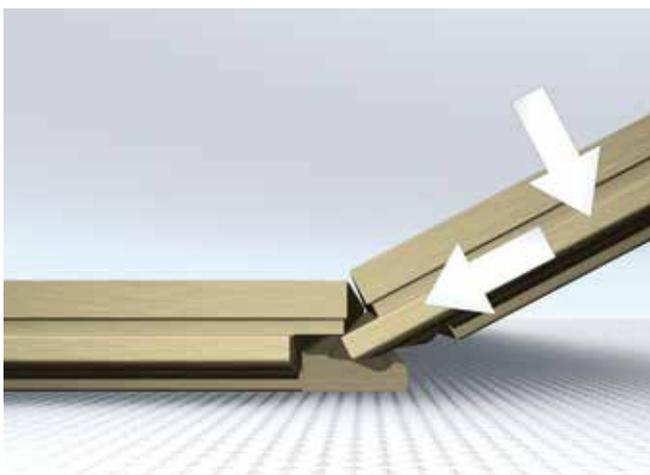


Hold the panel to be installed at an angle of 20° to 30°. Move the panel gently up and down and at the same time exert forward pressure. The panels will automatically click into place.

GLUED DOWN

On the other hand, Premium Oak can also be installed glued down. This installation method is often selected to reduce some footfall sound. It also has a couple of disadvantages, for instance, the floor must be completely flat, dry and clean before installing and board replacement is considerably more difficult. Ask your retailer for more information.

METHOD 2 : HORIZONTAL INSERTION

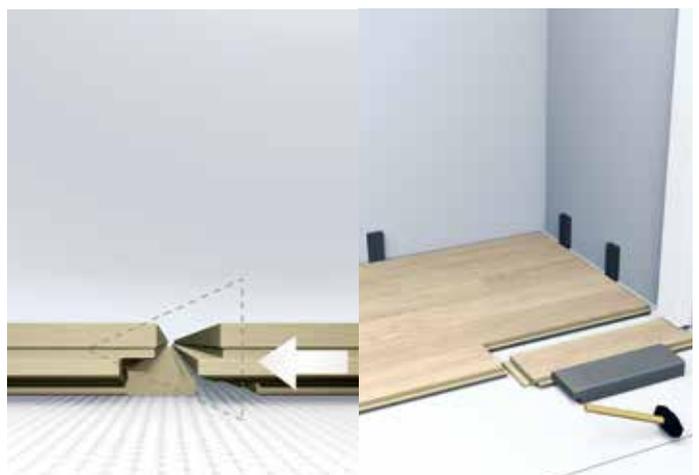

Ideal for awkward corners or installing under door frames. Unlike most other systems, Uniclic® panels can also be joined together horizontally. This is essential when you install the last row of panels to be installed or in places where it is difficult or even impossible to rotate the panels (underneath door frames, for example).



PREMIUM OAK

LENGTH: 1820mm | WIDTH: 190mm | THICKNESS: 14mm | 1 BOX: 6 PLANKS ≈ 2.075m²



EIGER

WBO6521



BLANC

WBO1522



ASPEN GREY

WBO1004



SIERRA

WBO2524



KILIMANJARO

WBO8865



MATTERHORN

WBO7809



EVEREST

WBO3526



BLACK FOREST

WBO4528

20 year wear*
warranty

structural lifetime
warranty



Premium

FLOORS AUSTRALIA

www.premiumfloors.com.au

Sydney	Tel.: (02) 9982 3777
Melbourne	Tel.: (03) 9798 0808
Brisbane	Tel.: (07) 3273 3111
Adelaide	Tel.: (08) 8262 8666
Tasmania	Tel.: (03) 9798 0808
Northern Terr.	Tel.: (08) 8262 8666
Perth	Tel.: (08) 9240 1966

Commercial Division Tel.: (03) 9798 0808

* Residential applications only

Product images may differ from actual product. The availability of products, or the products themselves, may change at any time without notice.
Contents © 2015 by Premium Floors Pty. Ltd. All rights reserved. The contents of this brochure may not be reproduced in whole or in part without prior written permission from the publisher.